
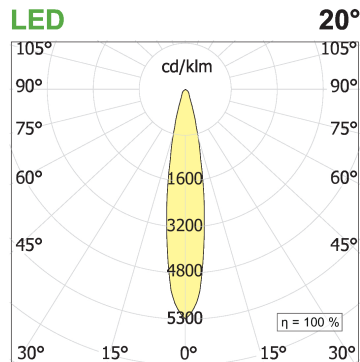


**File profile recessed with Leva modules**

code F1023.927SD/01

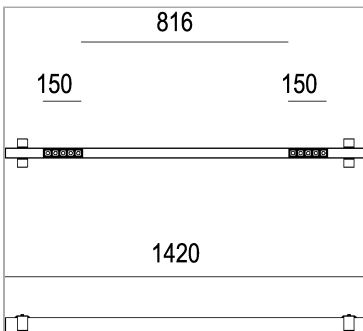

**PRODUCT DESCRIPTION**

Direct light indoor recessed lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Leva 5 spot series with high color rendering LED sources; 22 W temperature 2700K; fixed optics with aperture 20°; protocol Dimmable Dali / Touch & Dimm. Lamp with finish: white box - black optic. Degree of protection IP20.

**PRODUCT SPECS**

Installation method	Recessed with frame
Light source	LED
Absorbed power	10x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Spot 20°
Finishing	White box - black optic
Luminous flux of the product	2150 lm
Luminous efficiency	98 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	Dimmable Dali / Touch & Dimm
Energy efficiency class	E
Weight	2.1 Kg
Dimension	L1420 mm
Hole size	squared cut   42xL+2 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.