





PROJECTORS

SEMPLICE

SEMPLICE

PROIETTORI CON BASETTA - PROJECTORS WITH BASE



altre versioni / more versions

SEMPLICE TRACK 230V

vedi catalogo "Profili Le Collezioni" | see catalogue "Profili Le Collezioni"



Posizioni di lavoro

Il braccio a slitta permette di assumere diverse posizioni di lavoro e di mantenerle grazie al blocco del puntamento.

Working positions

The slide rod allows to take different working positions and keep them through the aiming lock mechanism.



CEILING POSITION



SUSPENDED POSITION



AIMING POSITION

Proiettori professionali da parete e soffitto completo di sorgente COB LED con ottiche da 15°- 24°- 38° intercambiabili Twist & Lock, disponibili anche nella versione dimmerabile dali e taglio di fase ed in versione per orticoltura. Corpo e gruppo ottico di sezione cilindrica in estruso di alluminio verniciato. Snodi meccanici in acciaio. Orientabilità del gruppo ottico dalla posizione di riposo verticale di 355° sull'asse verticale e da 0° a 90° su quello orizzontale mediante braccio a slitta. Mantenimento della posizione grazie al blocco di puntamento.

Professional wall and ceiling projectors complete with COB LED source with 15 ° - 24 ° - 38 ° Twist & Lock interchangeable optics, available in DALI dimmable, phase cut version and horticulture version also. Cylindrical body and optical group in painted extruded aluminum. Mechanical steel joints. Adjustability of the optical unit from the vertical rest position of 355 ° on the vertical axis and from 0 ° to 90 ° on the horizontal one using the sliding arm. Lockable pointing position.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



ORIENTABILE / ADJUSTABLE



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.



HORTICULTURE Disponibili versioni LED HC (Horticulture) a spettro dedicato alle piante ornamentali / HC (Horticulture) LEDs that emit a spectrum tailored to ornamental plants.

KELVIN	
27	2700°K
30	3000°K
35	3500°K
40	4000°K
HC	HOTRTCULTURE

FASCIO/BEAM	
S	SPOT
F	FLOOD
W	WIDE

FINITURE STANDARD /STANDARD FINISHINGS


/01	BIANCO/WHITE
/02	NERO/BLACK
/49	BRONZO/BRONZE

FINITURE PREMIUM /PREMIUM FINISHINGS


/81	ORO ROSA/ROSE GOLD
/82	BRONZO ANTICATO / ANTIQUE BRONZE
/83	OTTONE BRUNITO SPAZZOLATO/BRUSHED BURNISHED BRASS

CURVE FOTOMETRICHE/PHOTOMETRIC DATA

SEMPLICE 55

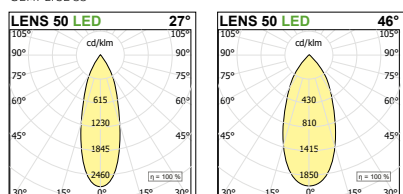

SEMPLICE 90

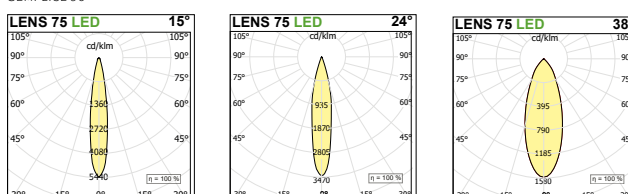




SEMPLICE Basetta




P55 PARETE-SOFFITTO P55 WALL & CEILING PROJECTOR



LED W	Ø	H	Kg	lm product/beam 3000K			CODE
				S15°	F27°	W46°	
12	55	200	1,0	1285	1285	1289	SE503.9 ● ● ● /##
18	55	200	1,0	1575	1575	1579	SE504.9 ● ● ● /##

Accessori - accessories: L055#.A: Anello Ø55 + lente a lens with ring Ø55

P90 PARETE-SOFFITTO P90 WALL & CEILING PROJECTOR



LED W	Ø	H	Kg	lm product/beam 3000K			CODE
				S15°	F24°	W38°	
17	90	240-270	1,4	1930	1827	1905	SE501.9 ● ● ● /##
24,3	90	240-270	1,4	2468	2356	2430	SE502.9 ● ● ● /##
32	90	240-270	1,4	3006	2885	2955	SE505.9 ● ● ● /##

Accessori - accessories: L085#.A: Anello Ø85 + lente a lens with ring Ø85

PROJECTORS

ACCESSORI / ACCESSORIES



LENTI NYX 55 / LENSES 55

	Ø	Kg	CODE
LENTE SATINATA / SATINED LENS	55	0,01	L055S.A
LENTE ELISSOIDALE / ELIPSOID LENS	55	0,01	L055E.A
LENTE ASIMMETRICA / ASYMMETRIC LENS	55	0,01	L055A.A
FILTRO NIDO D'APE / HONEY COMB LOUVER	55	0,01	L055R.A

LENTI NYX 85 / LENSES NYX 85

	Ø	Kg	CODE
	85	0,01	L085S.A
	85	0,01	L085E.A
	85	0,01	L085A.A
	85	0,01	L085R.A

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN** ○ **KELVIN**
- 27 2700K 27 2700K
- 30 3000K 30 3000K
- 35 3500K 35 3500K
- 40 4000K 40 4000K
- HC Horticulture

- **FASCIO / BEAM**
- S** Spot
- F** Flood
- W** Wide

- **DIMMABLE (OPTIONAL)**
- D** Dali Touch & Dimm
- DF** Dimm taglio di fase | dimm trailing / leading edge

Per i gradi vedere in tabella - For degree check the table

/## FINITURA / FINISHING

- /01 bianco / white
- /02 nero / black
- /49 bronzo / bronze

COMPOSIZIONE CODICE: xxx.x ● ● ● /##

HOW TO CREATE THE CODE: **F1000.827SD/01**

CODE			
F1000.8	●	●	● /## — finishing
base code	kelvin	beam	dimmable